


PB-11

Deck mounted spout
Designer: Piet Boon



Dimensioned drawing

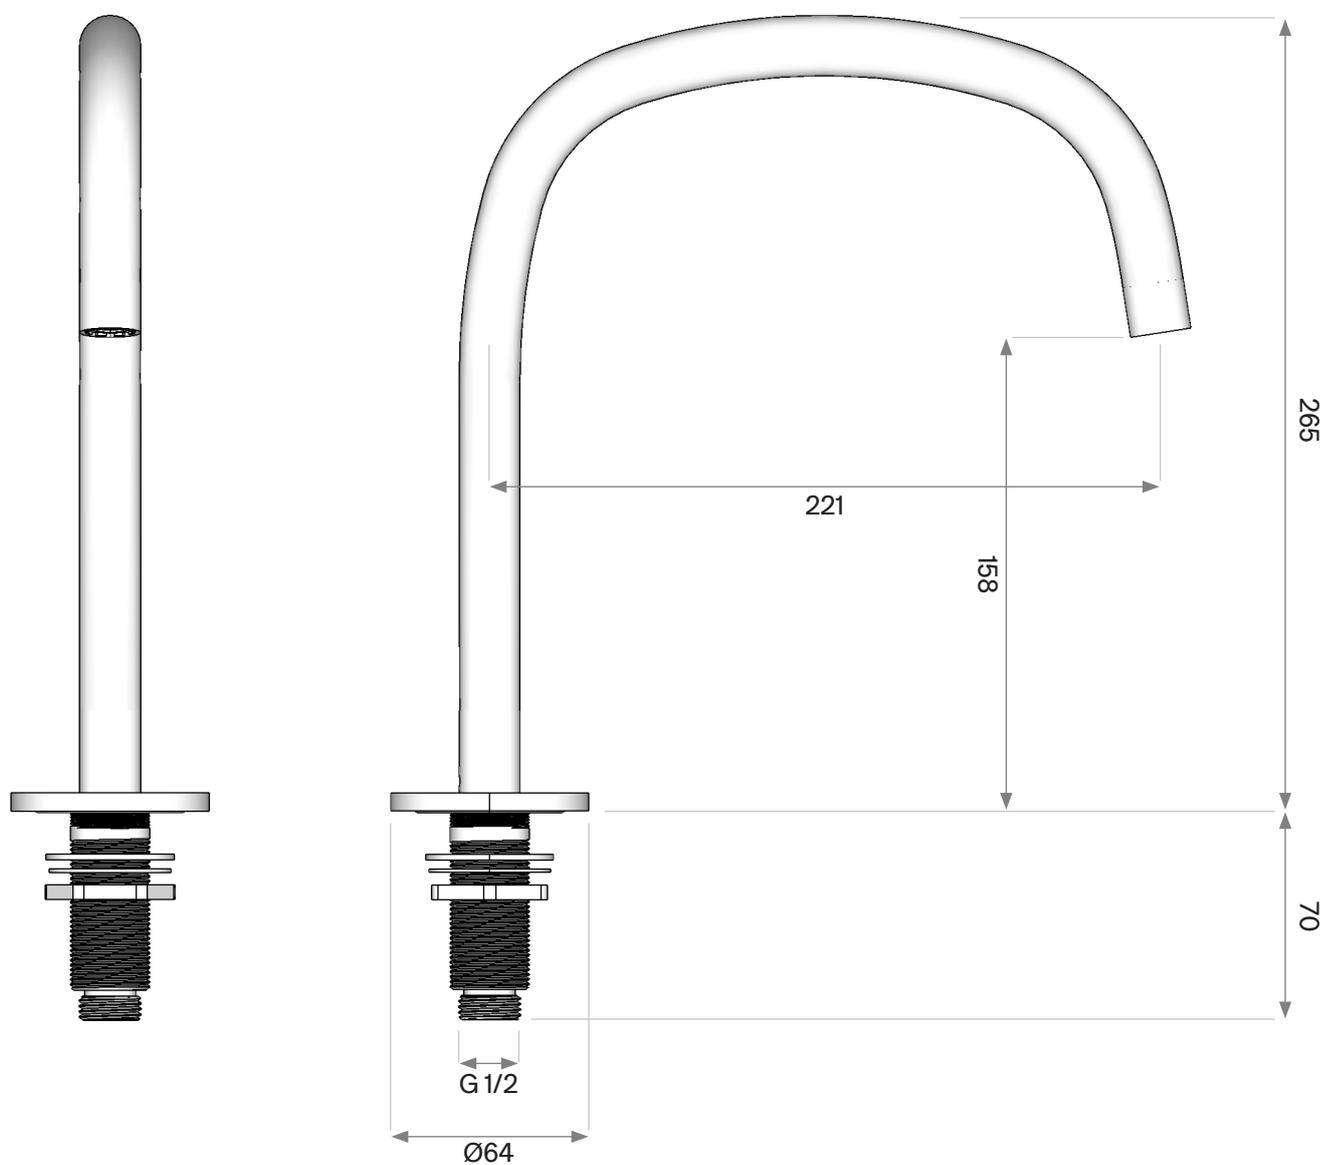


Spare Parts List

Deck mounted swivelling spout, projection 221mm




Part no	Spare part code	Article No	Description	QTY
1.	PB11-001	44325101001	Flow regulator M16.5	1
2.	PB11-002	PB11-002.000	Spout	1
3.	PB11-003	PB11-003.000	Pin	1
4.	PB11-004	70NBR103F	O ring Ø9.4 X 1.8	2
5.	PB11-005	PB11-005.000	Plastic bushing	2
6.	PB11-006	PB11-006.000	Rosette	1
7.	PB11-007	70NBR103F	O ring Ø59 X 2.5	1
8.	PB11-008	PB11-008.000	Intlet connection G½	1
9.	PB11-009	PB11-009.000	Mounting kit	1

Spare Parts List

Deck mounted swivelling spout,
projection 221mm

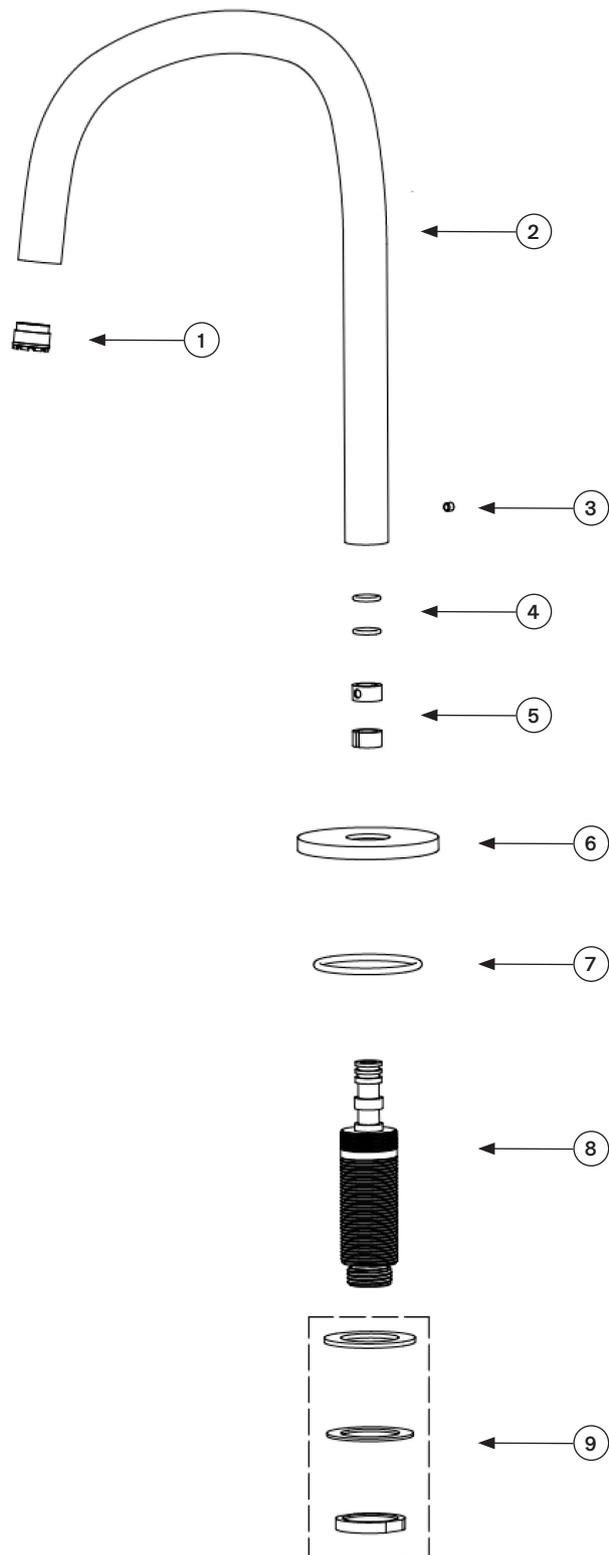

Installation Manual

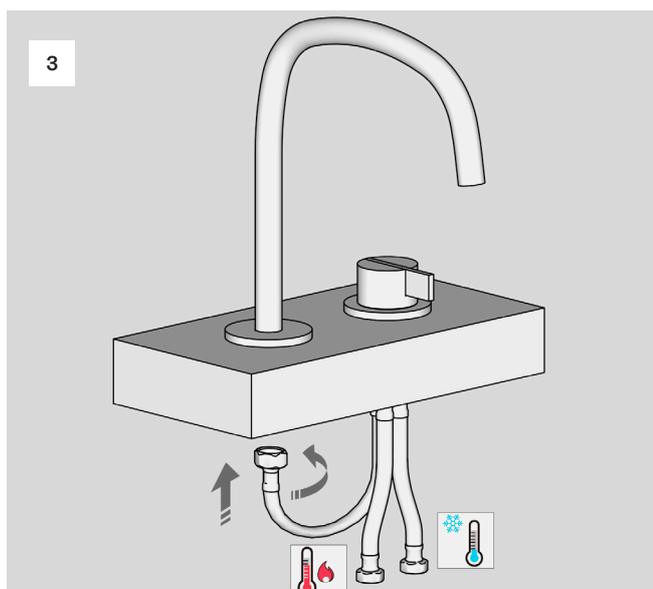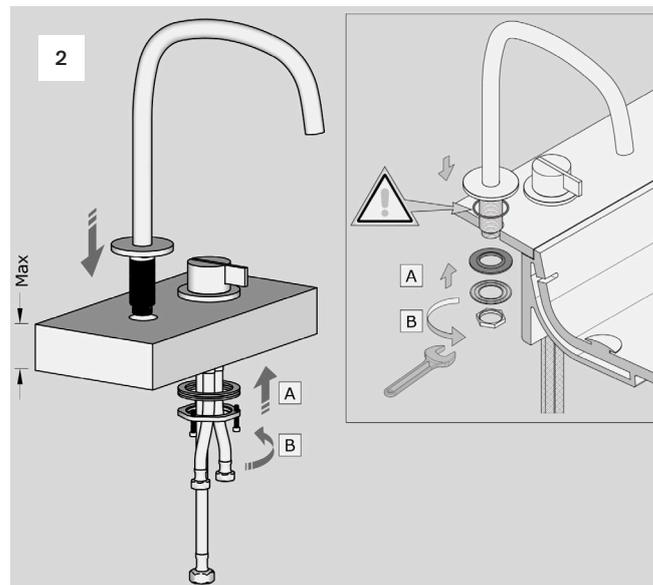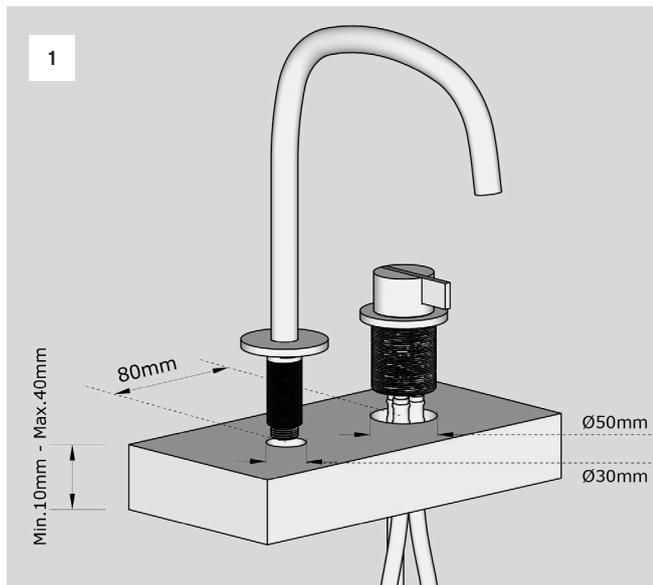

Operating conditions


-Recommended flow temperature	≤65°C
-Maximum flow temperature momentary	≤90°C
-Minimum flow pressure	2 bar
-Maximum flow pressure	5 bar
-Recommended operating pressure	3 bar
-Test pressure	10 bar

Attention of the plumber

The pipes have to be rinsed thoroughly before installation.

Avoid pressure differences between hot / cold water supply.

Use of pressure reducer when static pressure is higher than 5 bar to avoid damage the cartridge.

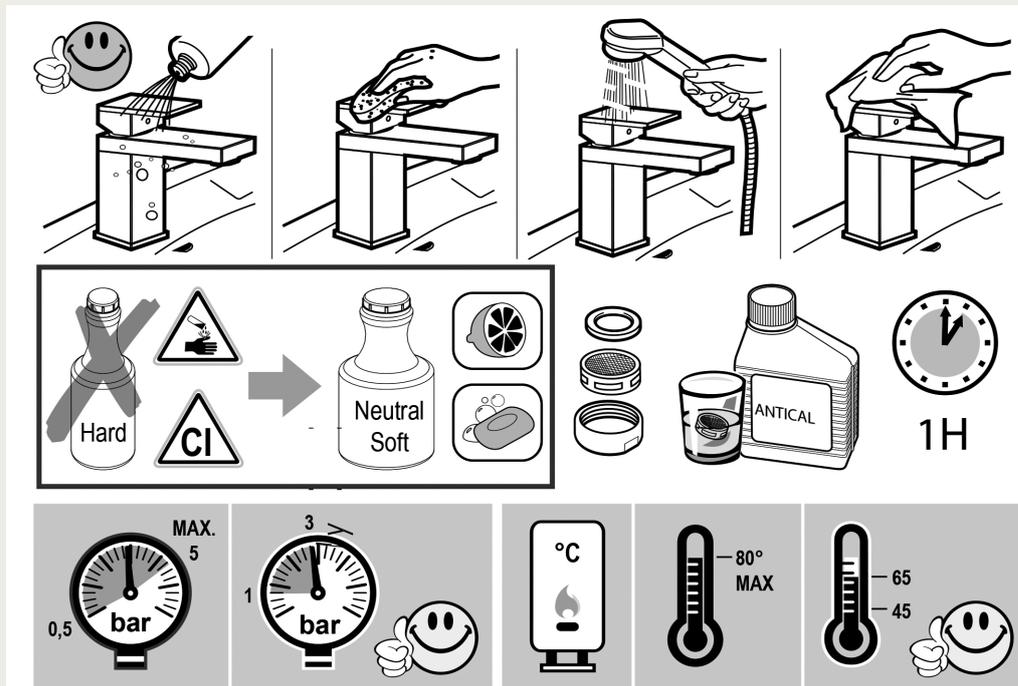

Please ensure you comply with the following instructions to optimise performance of the mixer:

- All pipework must be thoroughly flushed prior to installation
- For USA installation, please fix the USA NPT adapters on top of the pre-installed water connections
- Always first test the system with water pressure before closing the walls
- Optimal water pressure 3 BAR / temperature should not exceed 65°C/149°F
- Please read all installation instructions carefully

Failure to comply with manufacturers recommendations will void warranty