

# PB SET01

**PB SET01.0: 130mm**

**PB SET01.1: 180mm**

**PB SET01.2: 220mm**

**Basin Mixer with Spout  
To combine with Box02-L**

**Designer: Piet Boon**




**COCOON**

# PB 01-EXT-2020

Wall mounted single lever mixer  
Exposed trim parts  
Designer: Piet Boon




## Dimensioned drawing




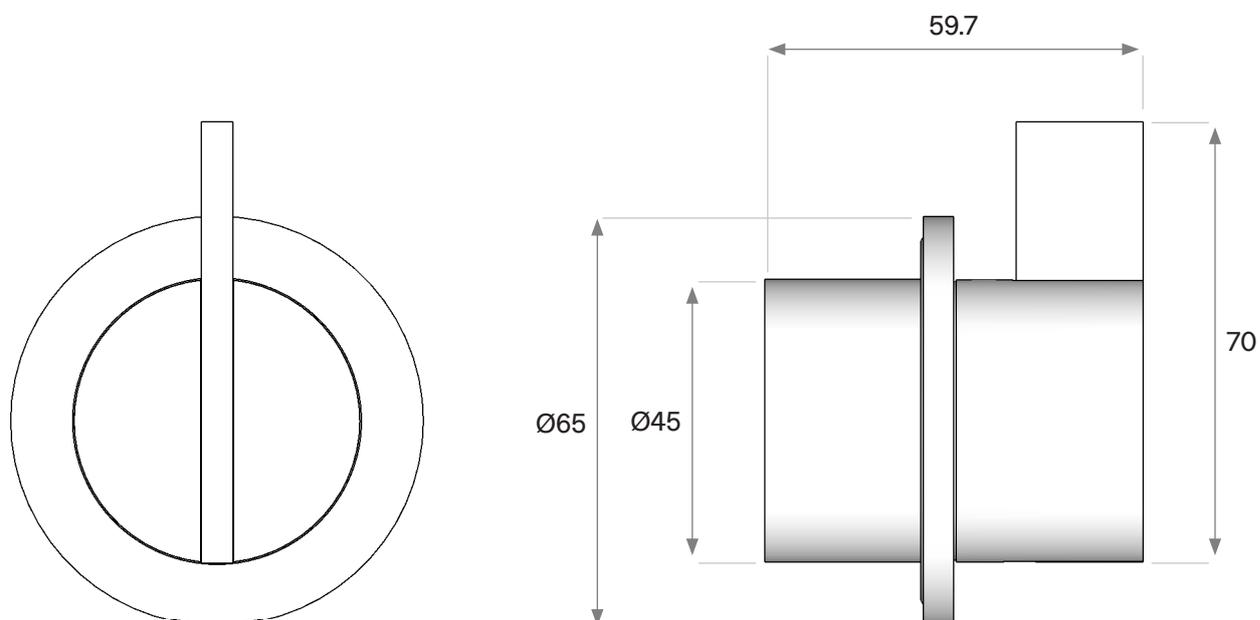


## Spare Parts List

Part no	Spare part code	Article No	Description	QTY
1.	PB01-EXT-001	PB01-EXT-001.000	Lever rod	1
2.	PB01-EXT-002	PB01-EXT-002.000	Handle cap	1
3.	PB01-EXT-003	PB01-EXT-003.000	Lever connectio	1
4.	PB01-EXT-004	PB01-EXT-004.000	Grub screw	1
5.	PB01-EXT-005	PB01-EXT-005.000	Screw	1
6.	PB01-EXT-006	PB01-EXT-006.000	Pin	2
7.	PB01-EXT-007	PB01-EXT-007.000	Plastic cap	1
8.	PB01-EXT-008	70NBR103F	O ring Ø33 X 1.8	1
9.	PB01-EXT-009	PB01-EXT-009.000	Rosette	1
10.	PB01-EXT-010	70NBR103F	O ring Ø49	1
11.	PB01-EXT-011	70NBR103F	O ring Ø59	1
12.	PB01-EXT-012	PB01-EXT-012.000	Sleeve ring	1

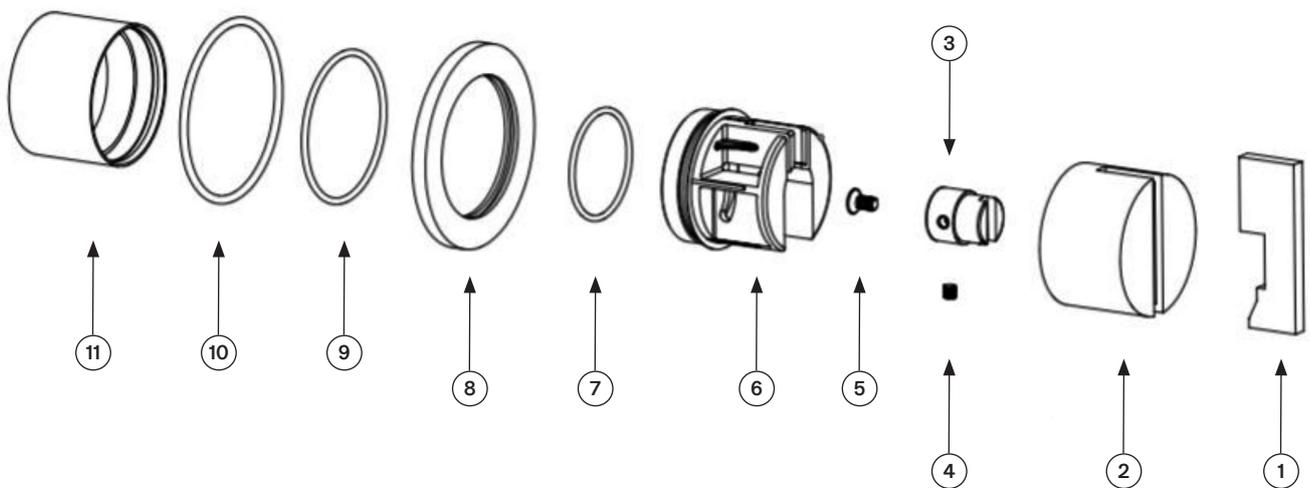

## Installation Manual

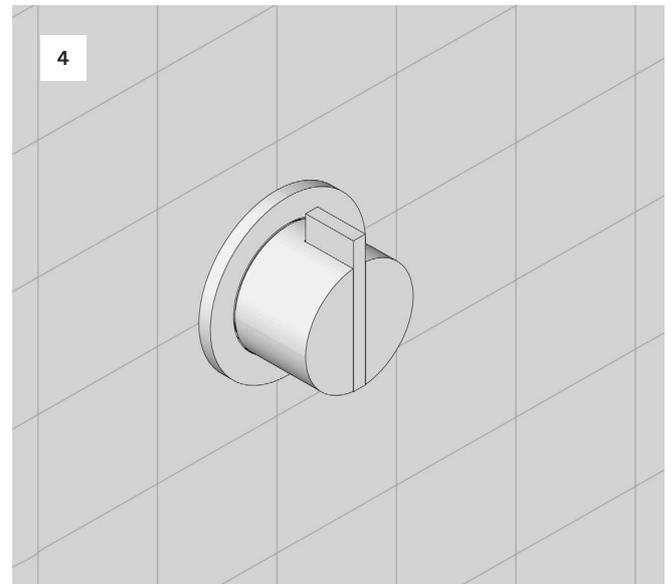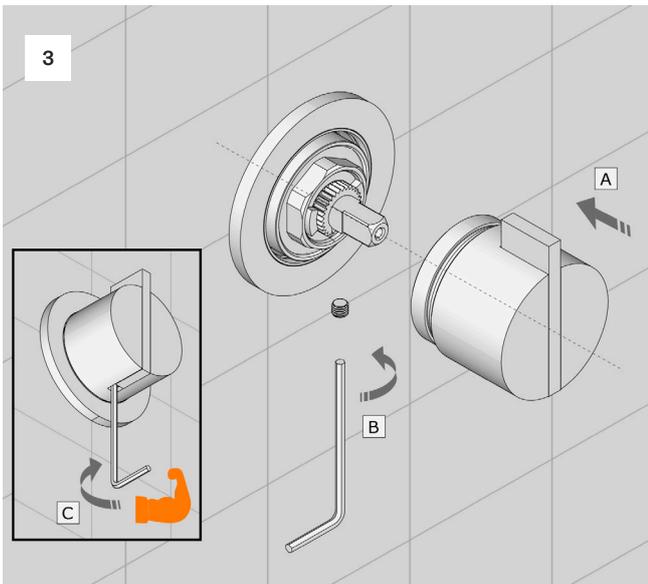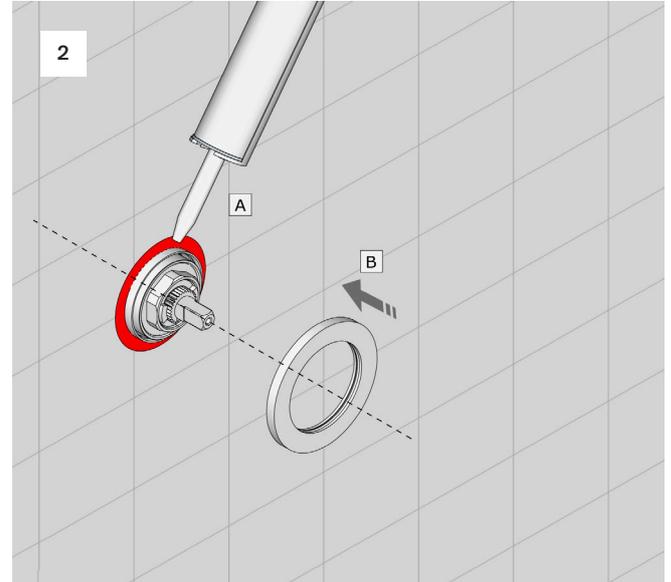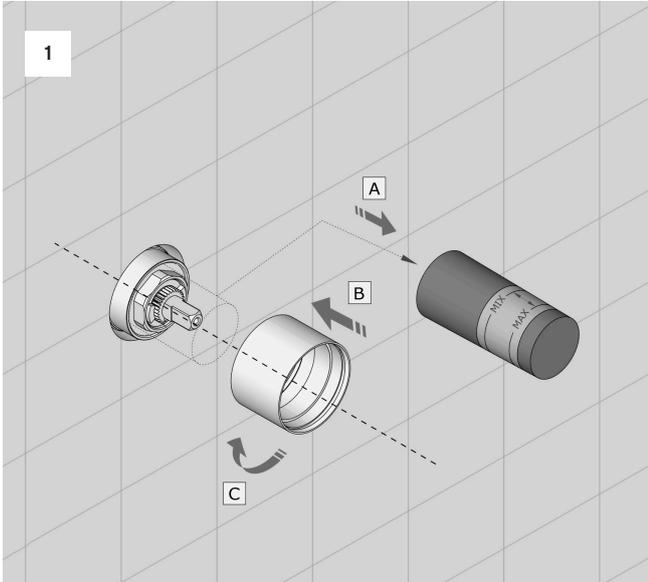

## Operating conditions

-Recommended flow temperature	≤65°C
-Maximum flow temperature momentary	≤90°C
-Minimum flow pressure	2 bar
-Maximum flow pressure	5 bar
-Recommended operating pressure	3 bar
-Test pressure	10 bar

## Technical Warnings

The pipes have to be rinsed thoroughly before installation.

Avoid pressure differences between hot / cold water supply.


Use of pressure reducer when static pressure is higher than 5 bar to avoid damage the cartridge.

# PB-10.0


Wall mounted with 130mm protection  
Designer: Piet Boon







## Dimensioned drawing

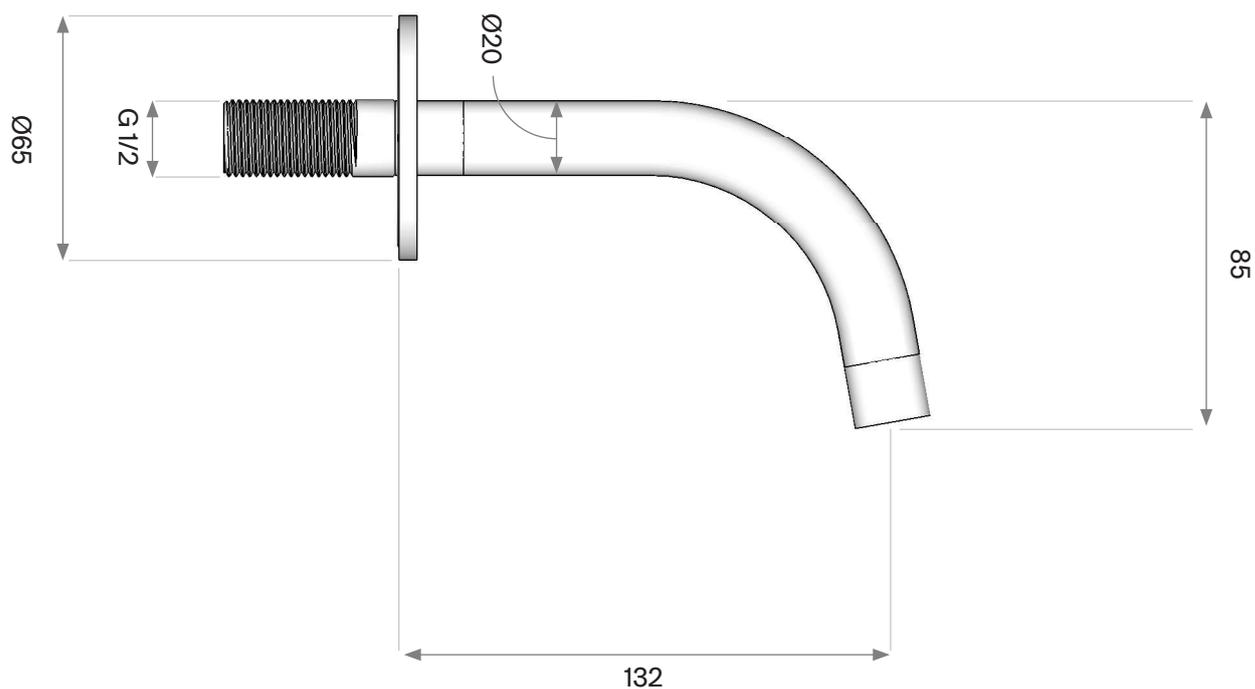

## Spare Parts List

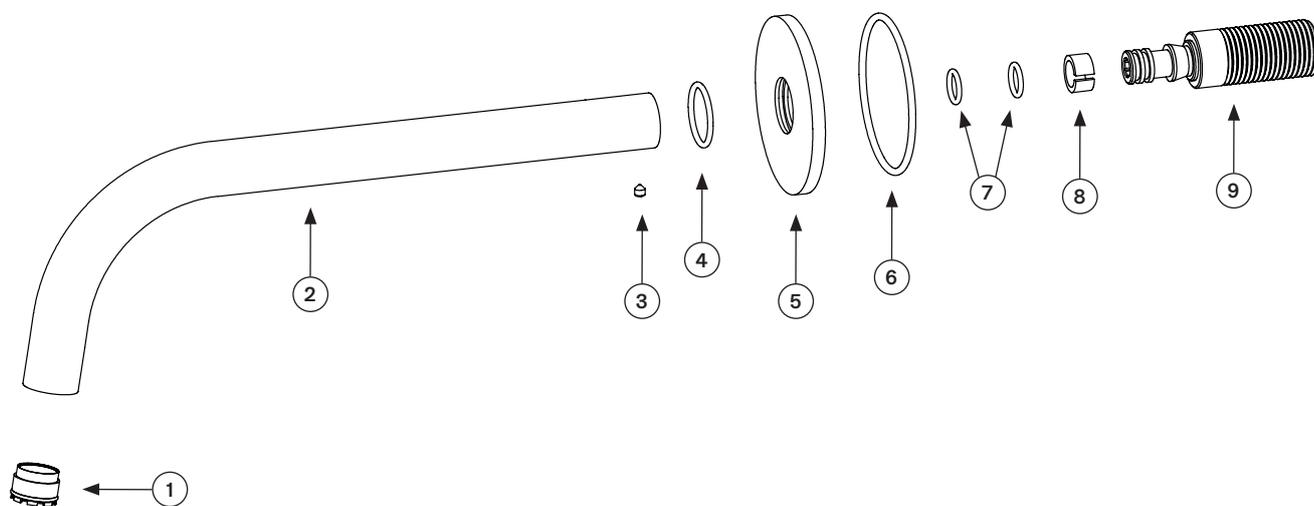

## Installation Manual

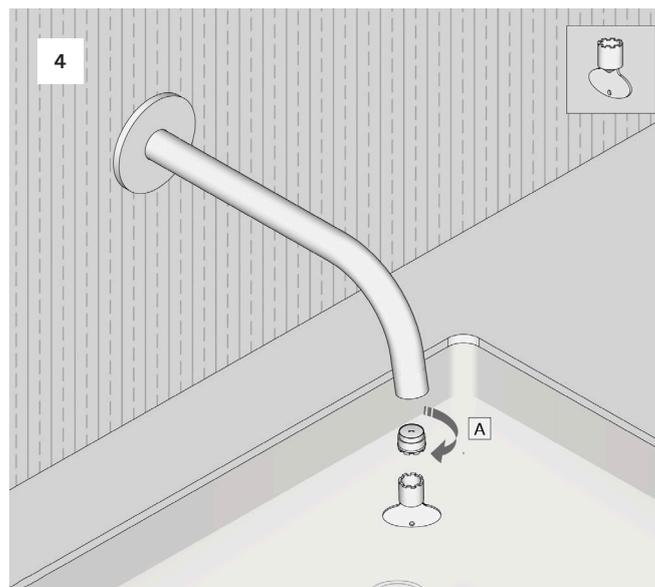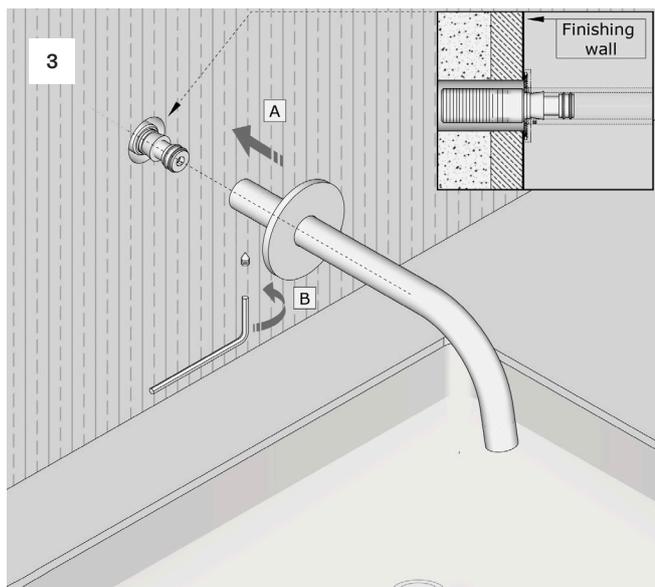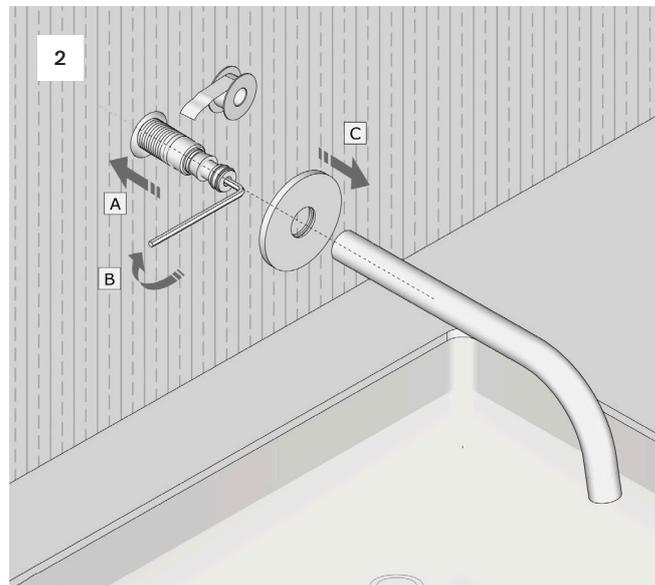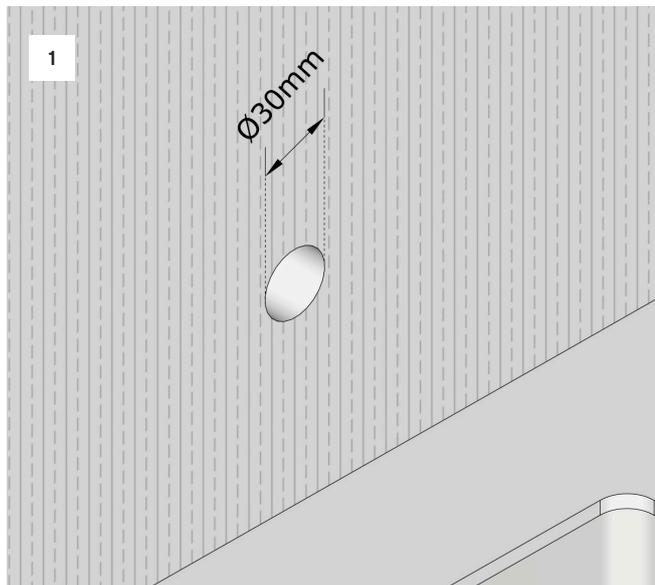

## TECHNICAL WARNINGS

The pipes have to be rinsed before installation to avoid the pressure differences.


Use a pressure reducer when static pressure is higher than 5 bar to avoid damage to the cartridge

# PB-10.1


Wall mounted with 180mm protection  
Designer: Piet Boon







## Dimensioned drawing

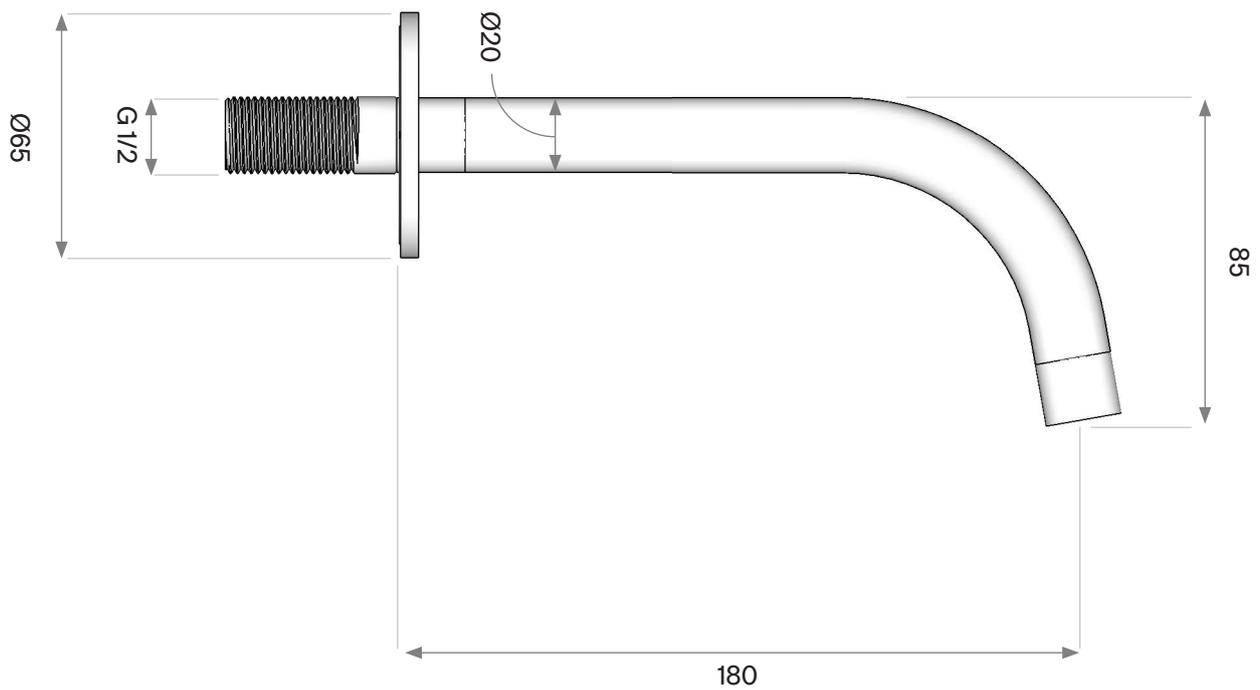

## Spare Parts List

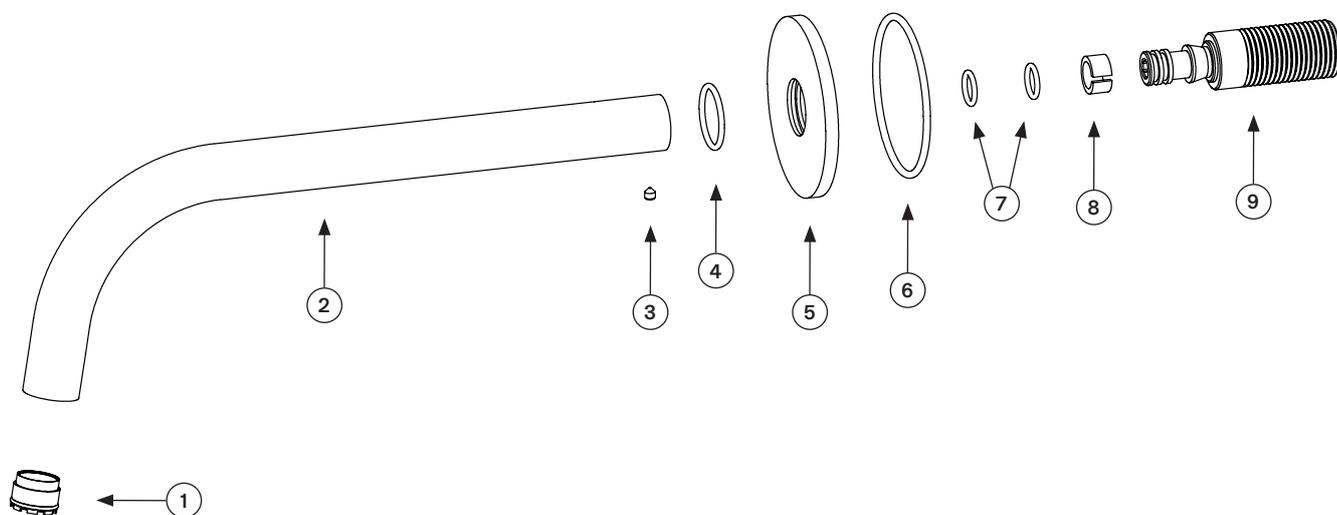

## Installation Manual

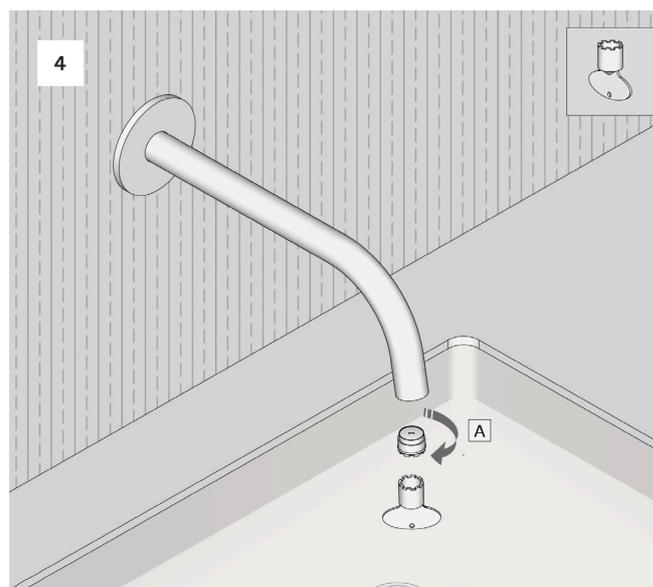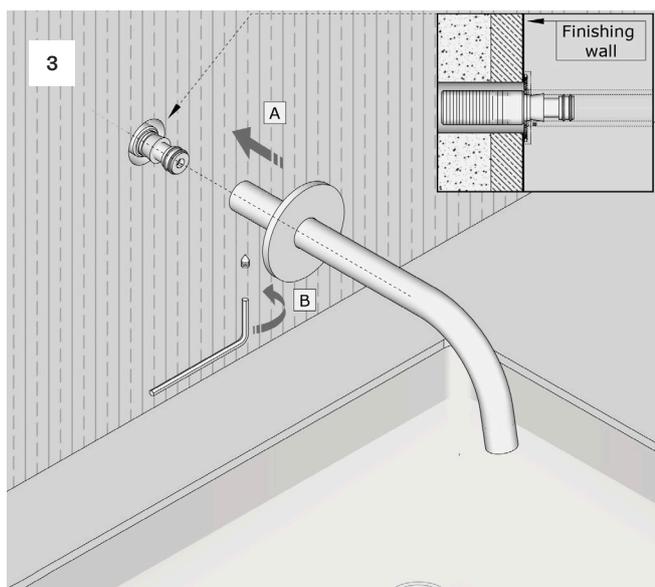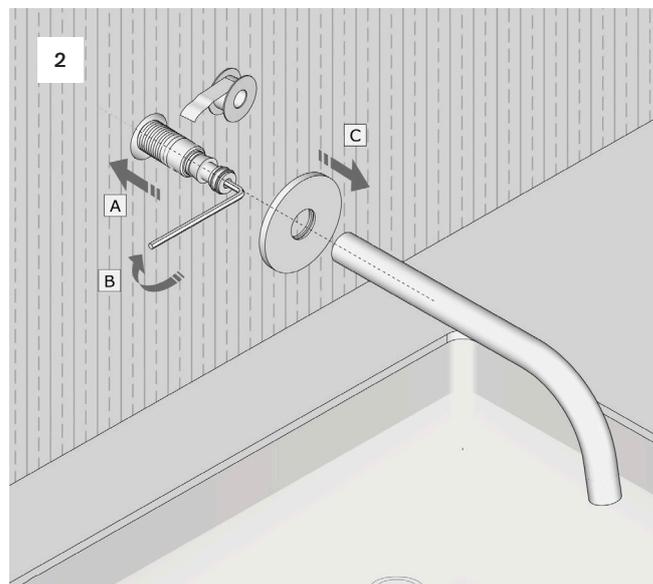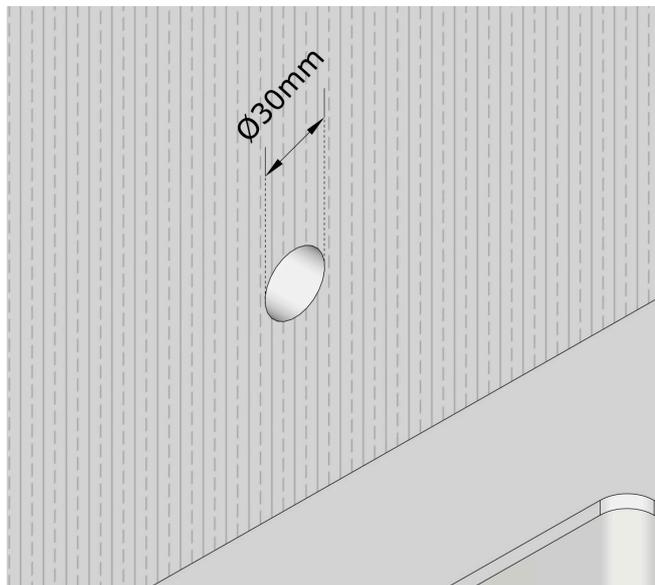

## TECHNICAL WARNINGS

The pipes have to be rinsed before installation to avoid the pressure differences.


Use a pressure reducer when static pressure is higher than 5 bar to avoid damage to the cartridge

# PB-10.2

Wall mounted spout  
Designer: Piet Boon




## Dimensioned drawing




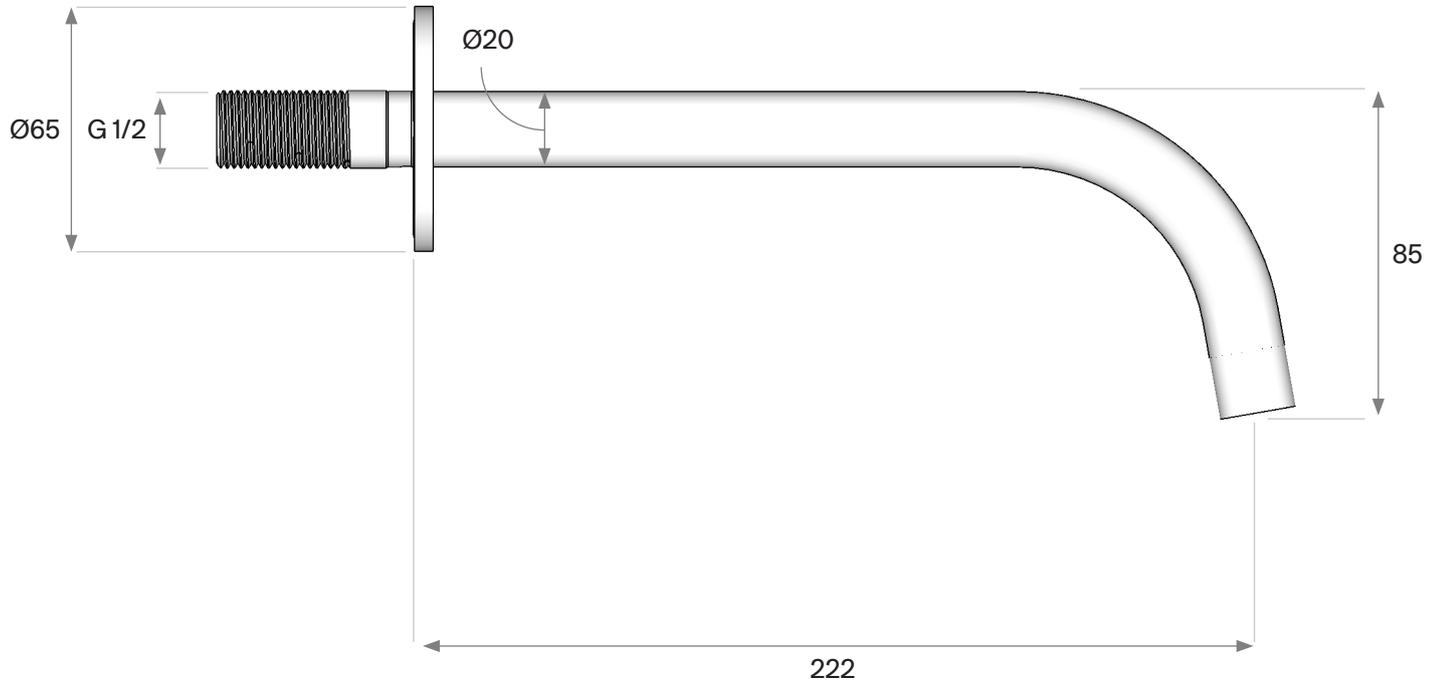


## Spare Parts List

Part no	Spare part code	Article No	Description	QTY
1.	PB10-001	44325101001	Flow regulator M16.5	1
2.	PB10-002	PB10-002.000	Spout	1
3.	PB10-003	PB10-003.000	Pin	1
4.	PB10-004	70NBR103F	O ring	1
5.	PB10-005	PB10-005.000	Rosette	1
6.	PB10-006	70NBR103F	O ring Ø59 X 2.5	1
7.	PB10-007	70NBR103F	O ring Ø8 X2	2
8.	PB10-008	PB10-008.000	Plastic bushing	1
9.	PB10-009	PB10-009.000	Intlet connection G½	1

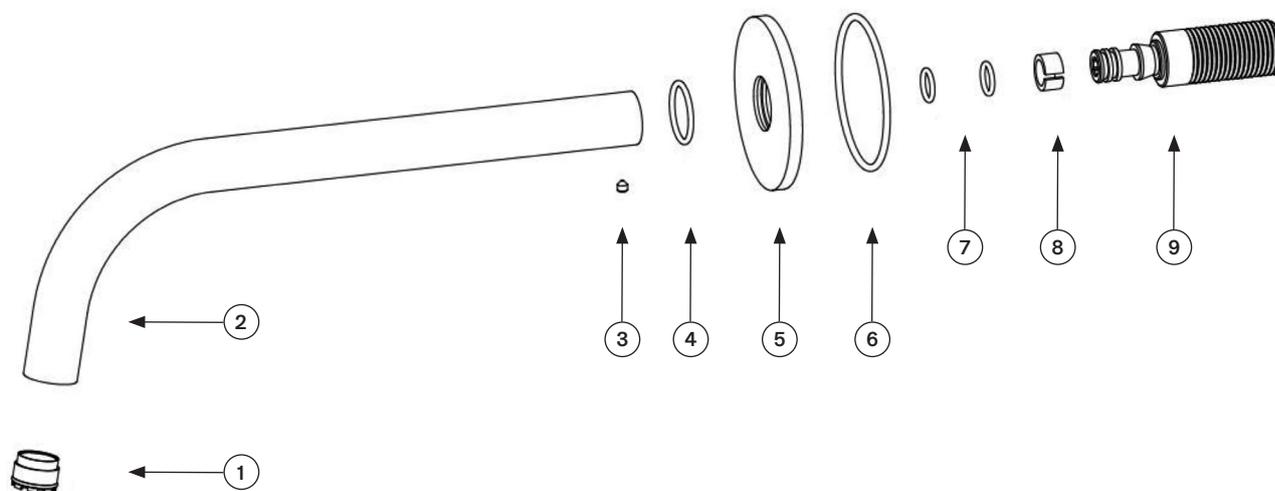

## Installation Manual

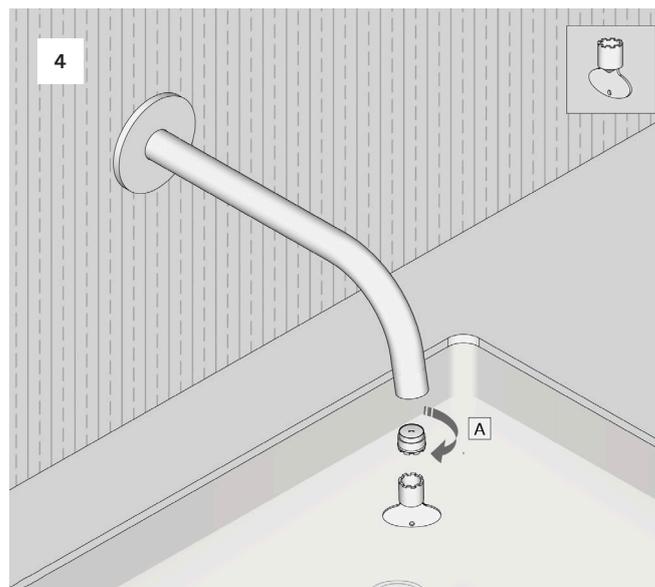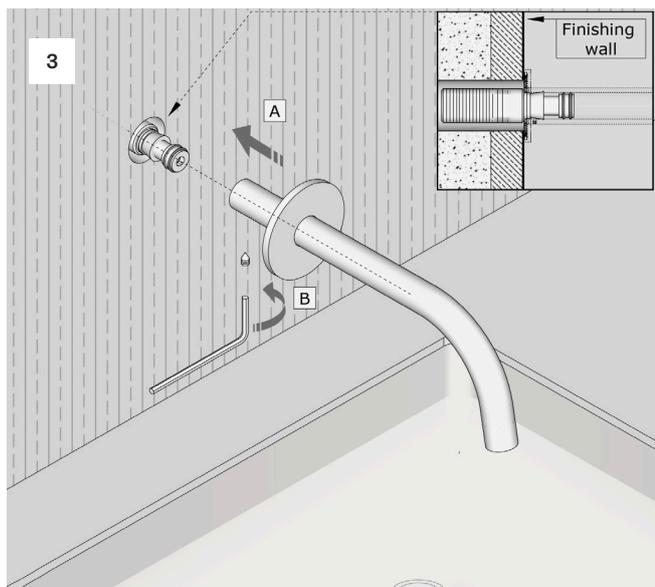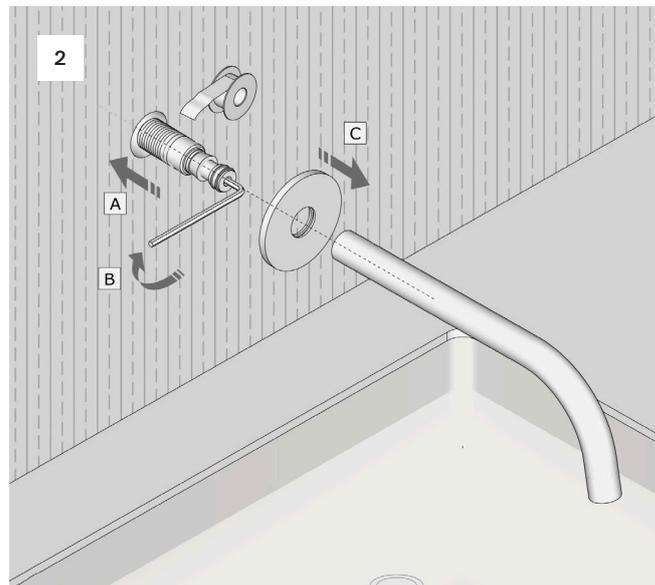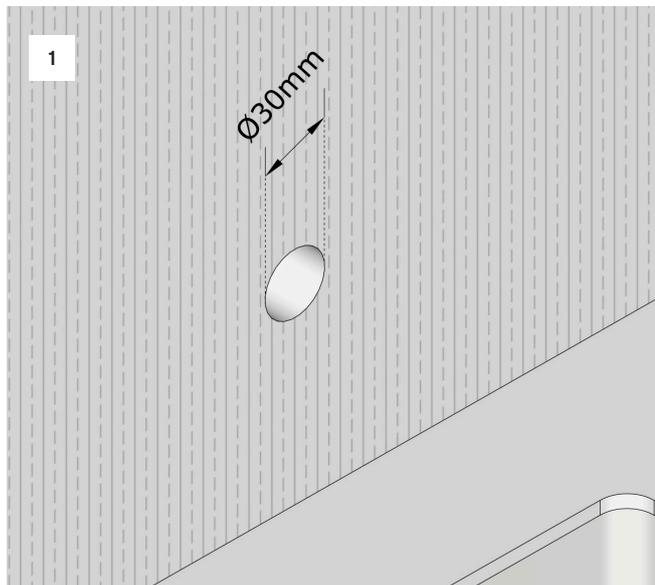

## TECHNICAL WARNINGS

The pipes have to be rinsed before installation to avoid the pressure differences.

Use a pressure reducer when static pressure is higher than 5 bar to avoid damage to the cartridge