


BOX04-VALVE-2024

Build-in thermostatic mixer
with flow volume control
Designer: Piet Boon

A large, dark gray circle containing the word "COCOON" in white, uppercase, sans-serif font.

COCOON


Dimensioned drawing

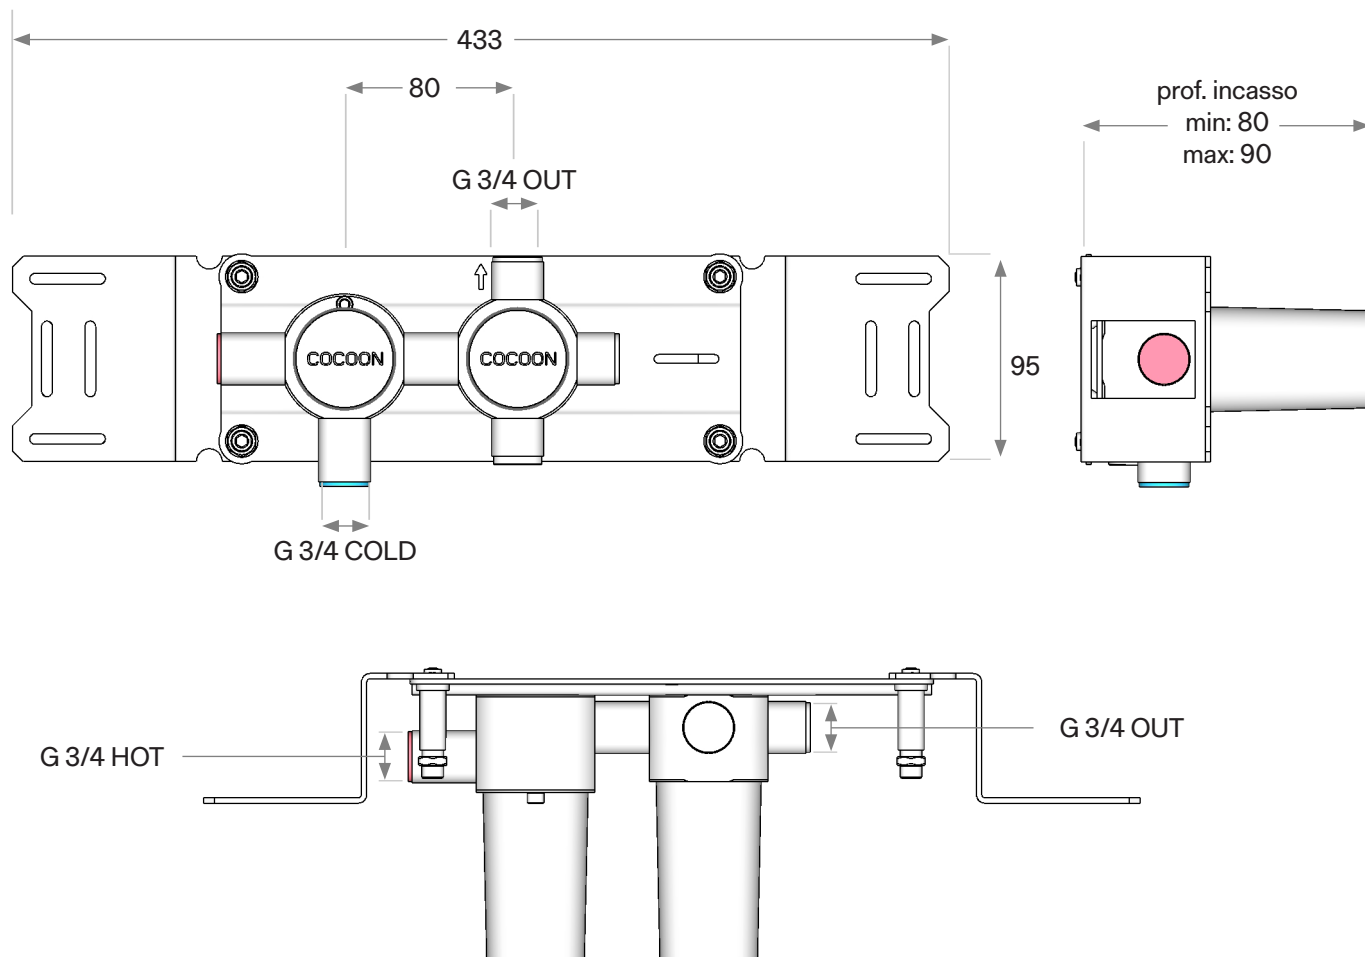







Spare Parts List


Part no	Spare part code	Article No	Description	QTY
1.	SP-BOX04-V-316-001	XXX	Plastic protection cap	2
2.	SP-BOX04-V-316-002	XXX	Fixing screw	1
3.	SP-BOX04-V-316-003	XXX	Griff adapter	1
4.	SP-BOX04-V-316-004	XXX	Stop sleeve for thermostatic	1
5.	SP-BOX04-V-316-005	XXX	Pin	2
6.	SP-BOX04-V-316-006	XXX	Fixing ring for thermostatic valve	1
7.	SP-BOX04-V-316-007	XXX	Dowel	1
8.	SP-BOX04-V-316-008	XXX	Fluehs thermostatic valve	1
9.	SP-BOX04-V-316-009	XXX	Fixing screw	1
10.	SP-BOX04-V-316-010	XXX	Shaft extension	1
11.	SP-BOX04-V-316-011	XXX	G1/2 switch valve core	1
12.	SP-BOX04-V-316-012	XXX	Valve housing	1
13.	SP-BOX04-V-316-013	XXX	O ring Ø40 X 2	1
14.	SP-BOX04-V-316-014	XXX	Metal stopper	1
15.	SP-BOX04-V-316-015	XXX	O ring Ø18 X 2	1
16.	SP-BOX04-V-316-016	XXX	Tccej M5 X 6	1
17.	SP-BOX04-V-316-017	XXX	Built-in body	1
18.	SP-BOX04-V-316-018	XXX	Locking ring	2
19.	SP-BOX04-V-316-019	XXX	Flow return preventer	2
20.	SP-BOX04-V-316-020	XXX	Adjustable mounting frame	1
21.	SP-BOX04-V-316-021	XXX	Screw M4 X 8	4

Spare Parts List

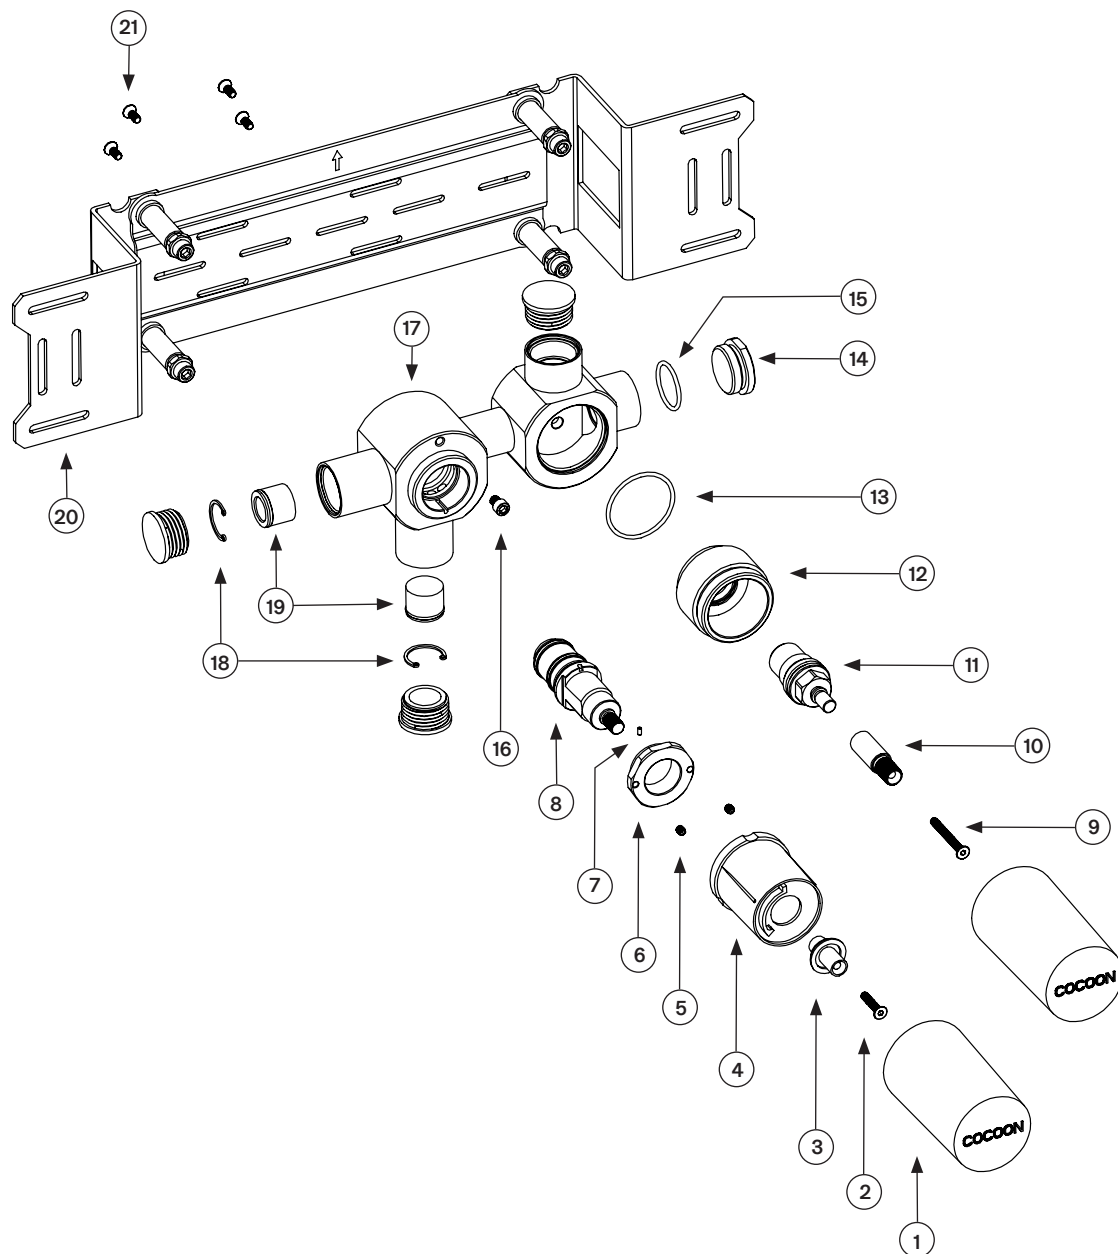

Installation Manual

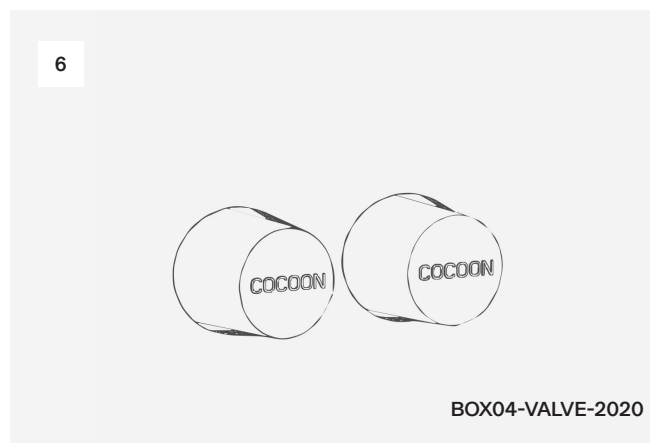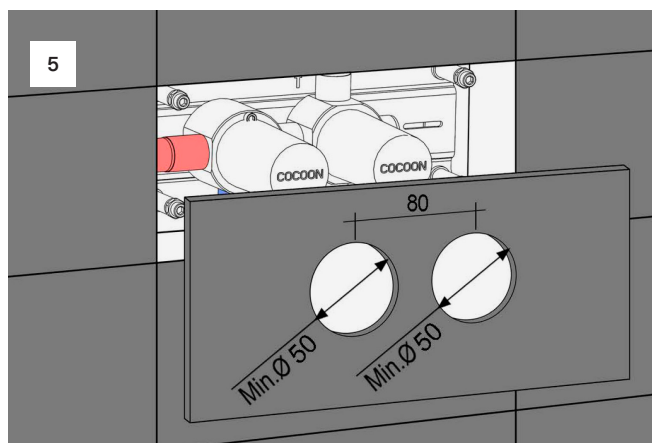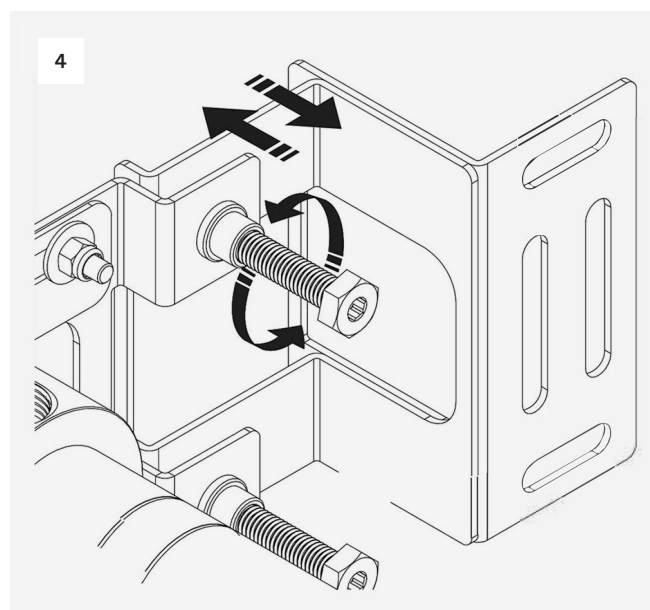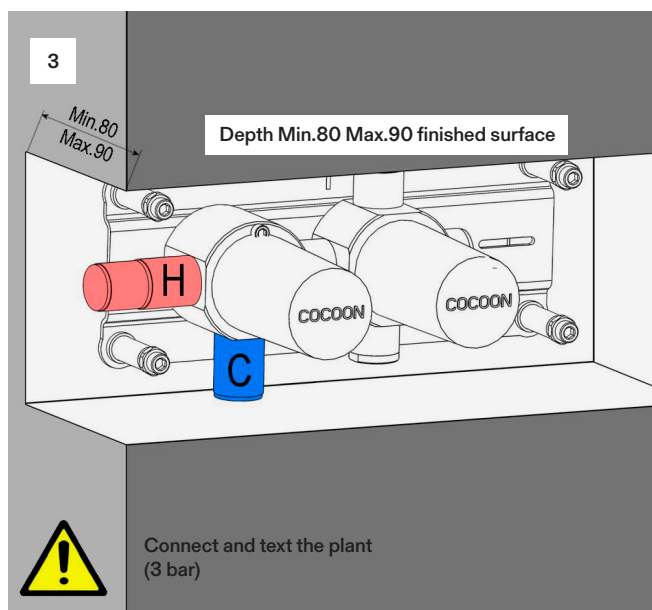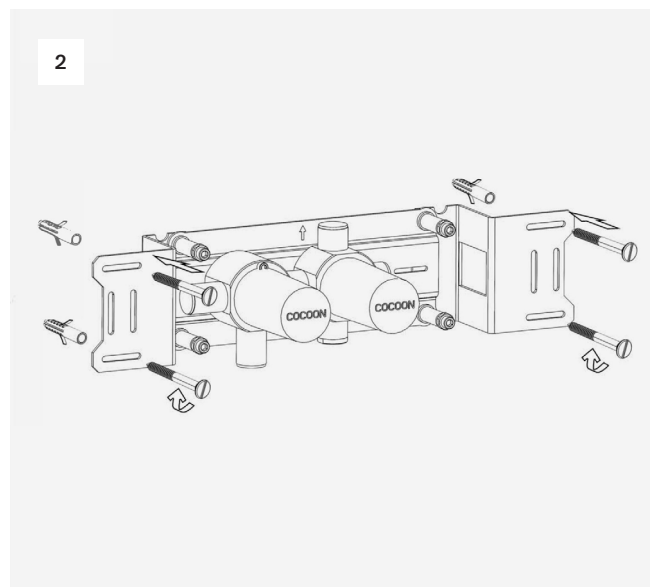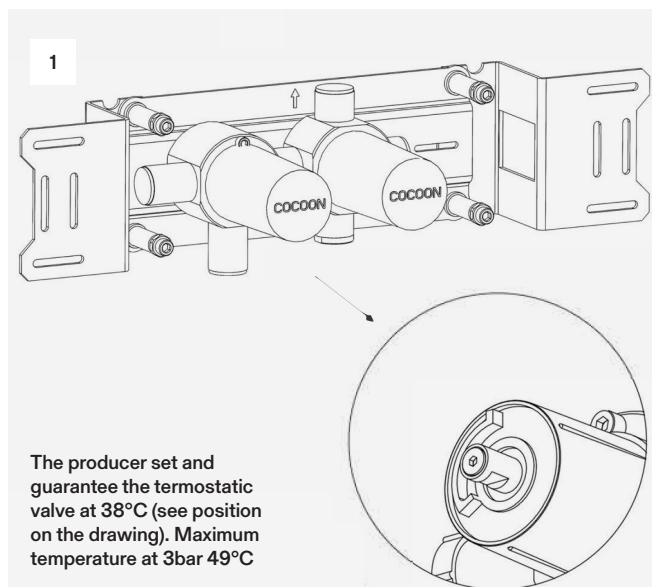

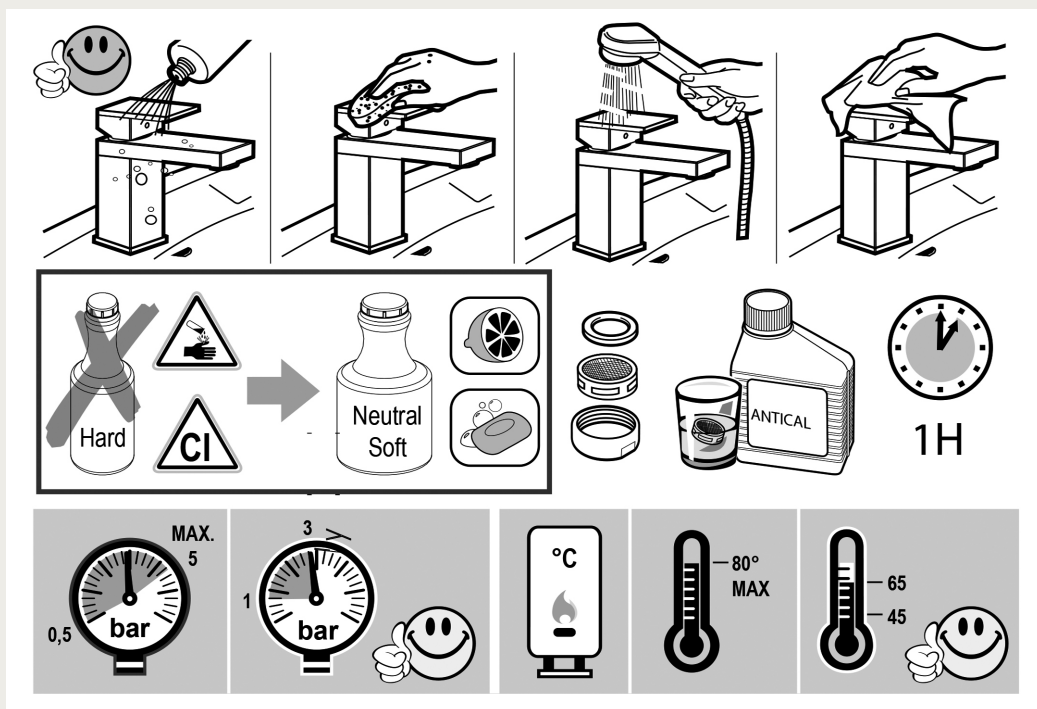

Please ensure you comply with the following instructions to optimise performance of the mixer:

- All pipework must be thoroughly flushed prior to installation
- For USA installation, please fix the USA NPT adapters on top of the pre-installed water connections
- Always first test the system with water pressure before closing the walls
- Optimal water pressure 3 BAR / temperature should not exceed 65°C/149°F
- Please read all installation instructions carefully

Failure to comply with manufacturers recommendations will void warranty