

# TOTO®

# MS604124CEF(R)(G)

## UltraMax® II One-Piece Toilet, 1.28GPF

### FEATURES

- TORNADO FLUSH® system, high-efficiency (1.28GPF/4.8LPF)
- CEFIONTECT® ceramic glaze - prevents debris and mold from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning.
- Universal Height
- Decorative one-piece design with high-profile tank
- Elongated front bowl with SoftClose® seat SS124
- Chrome trip lever
- 12" Rough-in, supply line sold separately

### MODELS

- **MS604124CEFG**  
With CEFIONTECT ceramic glaze & SoftClose seat SS124 (#01, #03, #11, #12)
- **MS604124CEFRG**  
Same as above with right-hand trip lever (#01 Only)
- **MS604124CEF**  
Without CEFIONTECT, but includes SoftClose seat SS124 (#51)

### OPTIONAL COMPONENTS

- **THU808(#01, #03, #11, #12, #51, #BN, #PN, #PB, #RB, #MBL)-A**  
Left Hand Trip Lever - Cotton, Bone, Colonial White, Sedona Beige, Ebony, Brushed Nickel, Polished Nickel, Polished Brass, Oil Rubbed Bronze, Matte Black

### COLORS/FINISHES

- #01 Cotton
- #03 Bone
- #11 Colonial White
- #12 Sedona Beige
- #51 Ebony

### PRODUCT SPECIFICATION

The one-piece high-efficiency TORNADO FLUSH system toilet shall be 1.28GPF/4.8LPF. Toilet shall have CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have high-profile tank, elongated front bowl and Chrome trip lever. Toilet shall be TOTO Model MS604124CEF\_\_\_\_.



 **TORNADO FLUSH**

 **CEFIONTECT**

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, CALGreen Title 24, City of Los Angeles Water Efficiency Ordinance, California Energy Commission Standards
- BAA Buy American Act Compliant
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements




### SPECIFICATIONS

• Water Use	1.28 GPF/4.8LPF
• Flush System	TORNADO FLUSH®
• Min. Water Pressure	8 psi (static)
• Water Surface	7-1/8" x 9-1/8"
• Trap Diameter	2-1/8"
• Rough-in	12"
• Trap Seal	2-1/8"
• Warranty	One Year Limited Warranty
• Material	Vitreous china
• Shipping Weight	99 lbs.
• Shipping Dimensions	32"L x 20"W x 17-3/4"H¹ x 28-3/4"H²

### INSTALLATION NOTES

#### Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

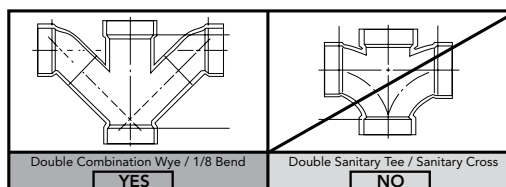

Install this product according to the installation guide.

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

Ultra-low high efficiency toilets require a system with adequate supplemental flows from other water usage fixtures and a 4" ID drainline with minimum 2% slope and maximum linear runs of 60ft.

Will comply with ADA when installed per Section 604 Water Closets and Toilet Compartments of the ADA 2010 Accessible Design Standard with seat height between 17" to 19", trip lever on approach side and flush actuation force of less than 5lbs.

Will comply with CSA B651 when installed per Clause 6.2.6 Toilets of the CSA 2012 Accessible Design Standard with seat height between 17" to 19", trip lever on approach side and flush actuation force of less than 5lbs.

